


Sicherheitseinbaumaße für DURAFLEX

Wassersprungbretter


Safety Installation

Measurements for DURAFLEX

Diving-boards

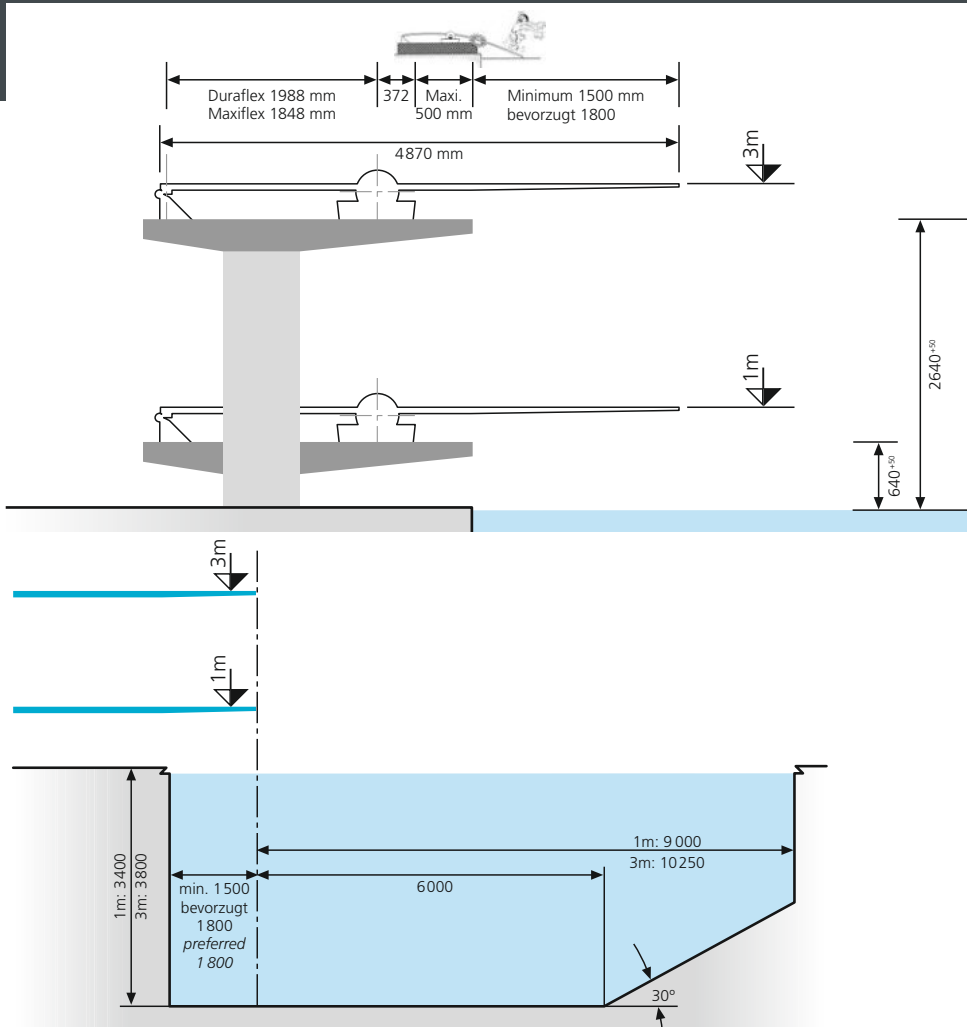

FINA

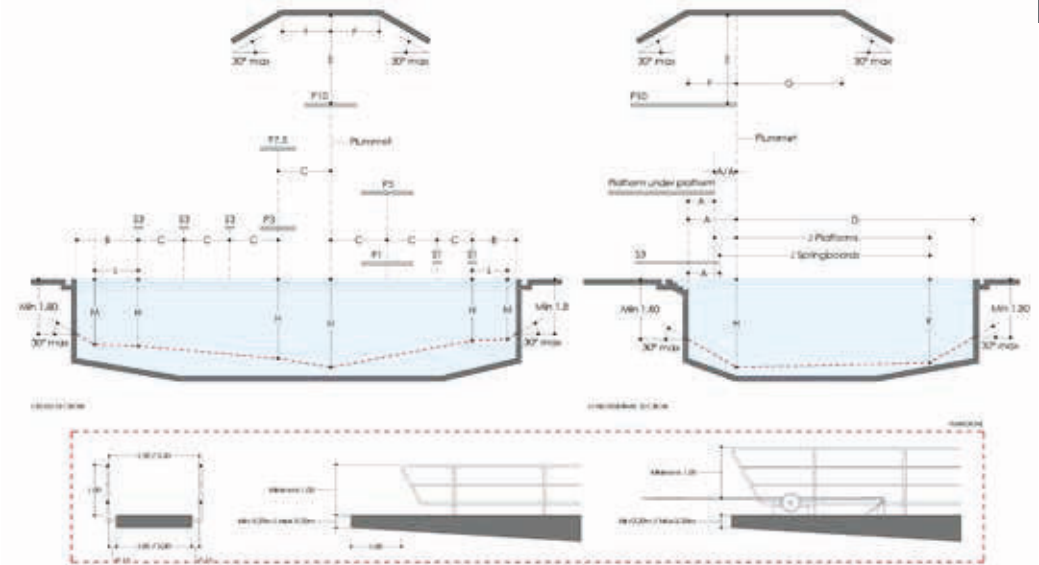

Kompetenz und Präzision:

Installationservice

Für den Aufbau Ihrer DURAFLEX-Sprunganlagen empfehlen wir unser ServiceTeam

Competence and Precision:

Installation Service

For the installation of your DURAFLEX diving equipment we recommend our service team

FINA Maße für Sprunganlagen			FINA Dimensions for Diving facilities:		SPRINGBOARD				PLATFORM												
FINA			For pools constructed after September, 26th, 2013 (see FR 5.3.1)		1 metre		3 metres		1 metre		3 metres		5 metres		7.5 metres		10 metres				
Benennung			Lenght		4.80		4.80		5.00		5.00		6.00		6.00		6.00				
min.			Width		0.50		0.50		1.00 min. 2.90 preferred		1.00 min. 2.00 preferred		2.90		2.00		3.00				
vorzugsweise			Height		1.00		3.00		0.60 min. 1.00 preferred		2.60 min. 3.00 preferred		5.00		7.50		10.00				
					Horiz	Vert	Horiz	Vert	Horiz	Vert	Horiz	Vert	Horiz	Vert	Horiz	Vert	Horiz	Vert			
A	Von der Lotrechten zurück zur Beckenwand	Benennung	A	From plummet back to pool wall for CONCRETE PLAFORM	Designation	A-1		A-3		A-1 pl		A-3 pl		A-5		A-7.5		A-10			
		min.			2.22		2.22		0.75		1.25		1.25		1.25		1.50		1.50		
	vorzugsweise	Preferred			2.22		2.22		0.75		1.25		1.25		1.25		1.25		1.50		1.50
	min.	Minimum			1.50		1.50														
Von der Lotrechten zurück zur Beckenwand	min.	A/A	From plummet BACK TO PLATFORM	Plummet directly below	Designation									A/A 5/1		A/A 7.5/3.1		A/A 10/5.3.1			
	vorzugsweise				Minimum									0.75		0.75		0.75			
B	Von der Lotrechten seitlich zur Beckenwand	Benennung	B	From plummet to POOL WALL AT SIDE	Designation	B-1		B-3		B-1 pl		B-3 pl		B-5		B-7.5		B-10			
		min.			2.50		3.50		2.50		3.00		4.00		4.50		5.75		5.75		
C	Von der Lotrechten zur darunter liegenden Lotrechten	Benennung	C	From plummet to ADJACENT PLUMMET	Designation	C-1-1		C3-3,3-1		C-1-1 pl		C3-3pl,1 pl		C5-3, 5-1		C7.5-5,3.1		C10-7.5,5,3.1			
		min.			2.00		2.20		1.85		2.20*		2.85*		2.75*		3.00*		3.00*		
D	Von der Lotrechten zur vorderen Beckenwand	Benennung	D	From plummet to POOL WALL AHEAD	Designation	D-1		D-3		D-1 pl		D-3 pl		D-5		D-7.5		D-10			
		min.			9.00		10.25		8.00		9.50		10.25		11.00		13.50		13.50		
E	Von der Lotrechten, Oberkante Sprungbrett, zur Decke	Benennung	E	On plummet, from BOARD TO CEILING	Designation		E-1		E-3		E-1 pl		E-3 pl		E-5		E-7.5		E-10		
		min.				5.00		5.00		3.25		3.25		3.25		3.25		3.25		4.00	
F	Raum ab Sprungbrett hinter und an jeder Seite der Lotrechten	Benennung	F	CLEAR OVERHEAD behind and each side of plummet	Designation	F-1	E-1	F-3	E-3	F-1 pl	E-1 pl	F-3 pl	E-3 pl	F-5	E-5	F-7.5	E-7.5	F-10	E-10		
		min.			2.50	5.00	2.50	5.00	2.75	3.25	2.75	3.25	2.75	3.25	2.75	3.25	2.75	3.25	2.75	4.00	
G	Raum nach oben vor der Lotrechten	Benennung	G	CLEAR OVERHEAD ahead of plummet	Designation	G-1	E-1	G-3	E-3	G-1 pl	E-1 pl	G-3 pl	E-3 pl	G-5	E-5	G-7.5	E-7.5	G-10	E-10		
		min.			5.00	5.00	5.00	5.00	5.00	3.25	5.00	3.25	5.00	3.25	5.00	3.25	6.00	4.00	6.00	4.00	
H	Wassertiefe an der Lotrechten	Benennung	H	DEPTH OF WATER At plummet	Designation		H-1		H-3		H-1 pl		H-3 pl		H-5		H-7.5		H-10		
		min.				3.40		3.70		3.20		3.50		3.70		4.10		4.50		5.00	
J K	Abstand und Tiefe vor der Lotrechten	Benennung	J K	DISTANCE AND DEPTH ahead of plummet for all stands	Designation	J-1	K-1	J-3	K-3	J-1 pl	K-1 pl	J-3 pl	K-3 pl	J-5	K-5	J-7.5	K-7.5	J-10	K-10		
		min.			5.00	3.30	6.00	3.60	4.50	3.10	5.50	3.40	6.00	3.60	8.00	4.00	11.00	4.25	11.00	4.25	
L M	Abstand und Tiefe an jeder Seite der Lotrechten	Benennung	L M	DISTANCE AND DEPTH each side of plummet	Designation	L-1	M-1	L-3	M-3	L-1 pl	M-1 pl	L-3 pl	M-3 pl	L-5	M-5	L-7.5	M-7.5	L-10	M-10		
		min.			1.50	3.30	2.00	3.60	1.40	3.10	1.80	3.40	3.00	3.60	3.75	4.00	4.50	4.50	4.25	4.25	
N	Größte Neigungen, angrenzend an die Bereiche, für die die oben genannten Anforderungen gelten	Benennung	N	MAXIMUM SLOPE TO REDUCE DIMENSIONS BEYOND FULL REQUIREMENTS FOR POOL DEPTH and CEILING HEIGHT					30 DEGREES												
		vorzugsweise			<p>* Note: The minimum distance between adjacent platforms must be at least 0.25 metres. Note: Dimensions B (plummet to pool wall at side) and C (plummet to adjacent plummet) apply to Platforms with widths as detailed in FR.5.2.5. If Platform widths are increased then B and C shall be increased by half the additional width(s). Note: The 10 Metre Platform must project 0.25 metres beyond any adjacent platform. Note: All platforms must project 0.75 metres beyond any platform directly below. Note: The leading edge of the concrete platforms for springboards must be at least constructed to be directly above the pool wall or beyond. Note: FR 5.3.4 The end of 5, 3 and 1 metre platforms must not project beyond the ends of the 3 and 1 metre springboards when they are adjacent to each other.</p>																

Bitte informieren Sie sich über den aktuellen Stand unter www.fina.org. Please check www.fina.org for the current status.

Änderungen können ohne Benachrichtigung vorgenommen werden. Wir behalten uns vor, Produkte abzuändern oder ganz aus dem Lieferprogramm zu streichen. Die Angaben in diesem Katalog sind ohne Gewähr.

Der Nachdruck bzw. die Kopie auch von Teilen dieser Dokumentation, sowohl auf elektronischem wie auch mechanischem Weg, bedürfen unserer ausdrücklichen schriftlichen Genehmigung.

© Copyright – Alle Rechte vorbehalten

Changes may be made without further notice. We reserve the right to change products or omit them from our program. The information given in this catalog is subject to change.

No part of this publication may be reproduced by any means, electronic or mechanical, including photocopying and microfilming, or utilized in any other form without permission in writing from the publisher.

© Copyright – All rights reserved

Flister Group GmbH & Co KG
Dorfäcker 4
D-91086 Aurachtal
Tel.: +49 (0) 91 32-30 01
Fax: +49 (0) 91 32-65 02
eMail: info@duraflex.de
web: www.duraflex.de